


How to fix Vibrating Terminals



Use preferably chemical anchor system.



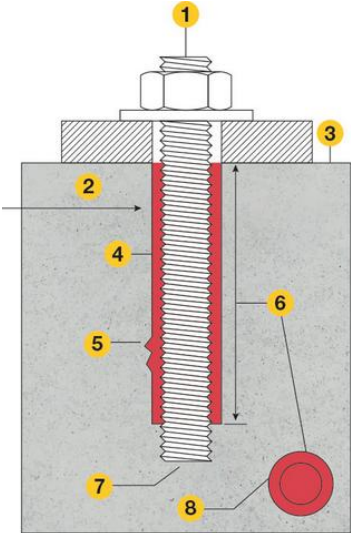

Use n. 4 STEEL THREADED ROD DIAM. 8 mm. of proper length

Between the motor and the wall you can use rubber to give little elasticity.



Put the control unit away and safe from the vibrations of the motors.



You can extend the length of the cables